

# Petri net models

## Petri nets

Named after Carl Adam Petri who, in the early sixties, proposed a graphical and mathematical formalism suitable for the modeling and analysis of concurrent, asynchronous distributed systems.

Widely used for modeling biological systems (more than 130 publications in PubMed since 2002)

Simple form : a bipartite directed graph

two types of nodes:

- **places** represent conditions or resources (ex: phosphorylated histidine kinase)
- **transitions** represent activities, *i.e.*, events that can change the state of the resources (ex: synthesis)

directed **arcs** interconnect places and transitions

- places exclusively connected to transitions
- transitions exclusively connected to places

**tokens** placed on places define the state of the Petri net

An arc might be **weighted**: number of tokens that must be in the pre-place to enable the transition

# Petri net models

Places are passive nodes. They are indicated by circles and refer to conditions or states. In a biological context, places may represent: populations, species, organisms, multicellular complexes, single cells, proteins (enzymes, receptors, transporters, etc.), molecules or ions. Only places are allowed to carry tokens.

Tokens are variable elements of a Petri net. They are indicated as dots or numbers within a place and represent the discrete value of a condition. Tokens are consumed and produced by transitions. In biological systems tokens refer to a concentration level or a discrete number of a species, *e.g.*, proteins, ions, organic and inorganic molecules. Tokens might also represent the value of physical quantities like temperature, pH value or membrane voltage that effect biological systems. A Petri net without any tokens is called “empty”. The initial marking affects many properties of a Petri net.


# Petri net models

**Transitions** are active nodes and are depicted by squares. They describe state shifts, system events and activities in a network. In a biological context, transitions refer to (bio-) chemical reactions, molecular interactions or intramolecular changes. Transitions consume tokens from its pre-places and produce tokens within its post-places according to the arc weights.

**Directed arcs** are inactive elements and are visualized by arrows. They specify the causal relationships between transitions and places and indicate how the marking is changed by firing of a transition.

Thus, arcs define reactants/substrates and products of a (bio-)chemical reaction. Arcs connect only nodes of different types. Each arc is connected with an arc weight. The arc weight sets the number of tokens that are consumed or produced by a transition. The stoichiometry of a (bio-)chemical reaction can be represented by the arc weights.

# Petri net models


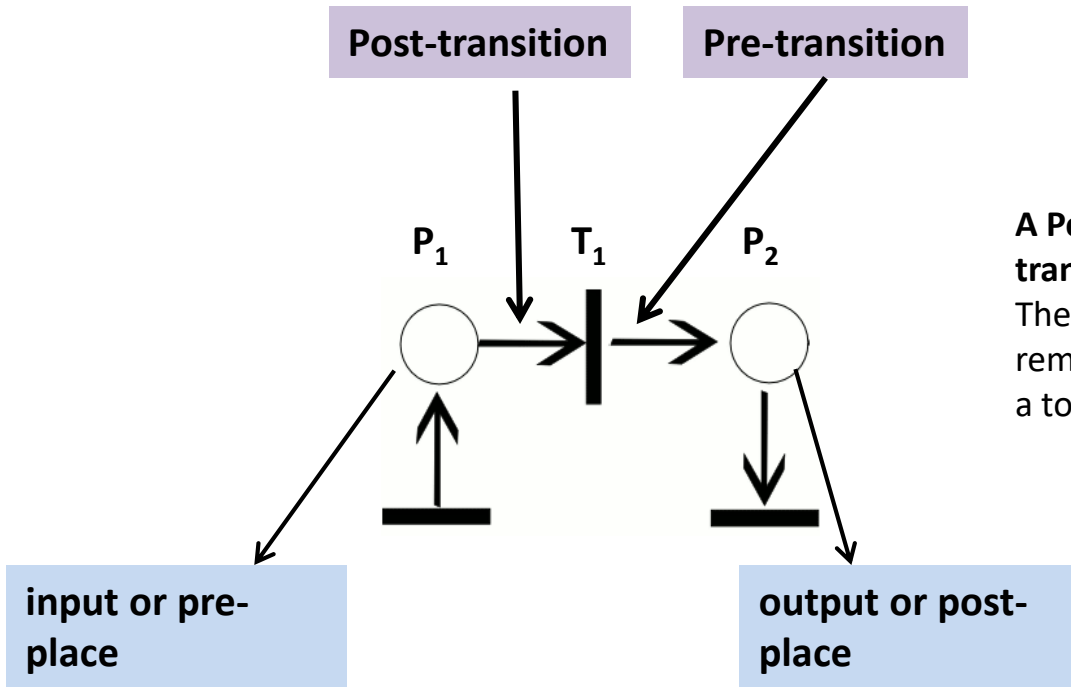


**A Petri net with two places  $P_1$  and  $P_2$  et one transition  $T_1$ .**


The transition will be enabled and may fire by removing the tokens from the pre-place  $P_1$  and adding a token to the post-place  $P_2$  pointed by the transition.

# Petri net models





To enhance the expressiveness of Petri nets, two other types of arcs:

- **test arc (or read arcs)** (activates the transition, does not consume tokens) 
- **inhibitor arc** (inhibits the transition) 

A • Read Arc

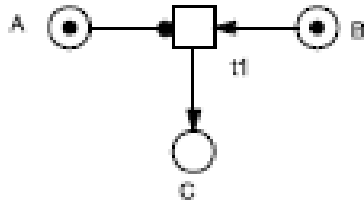

B • Inhibitor Arc

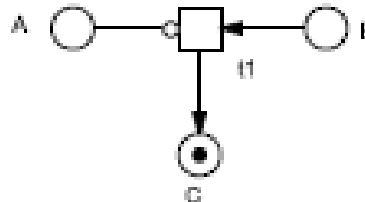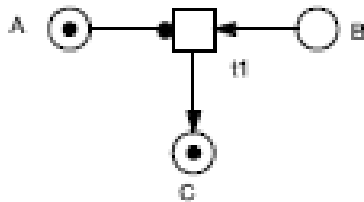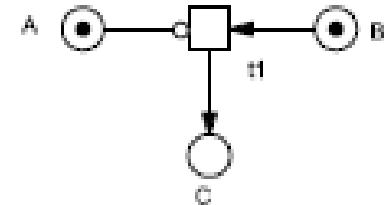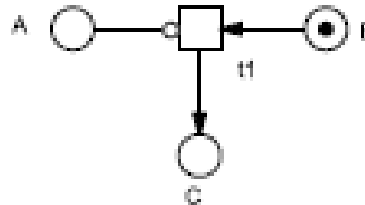

$t_1$  is enabled if places  $A$  and  $B$  are sufficiently marks. After firing, tokens are consumed from place  $B$  but not from place  $A$ .

$t_1$  is enabled if place  $B$  is sufficiently marks and place  $A$  insufficiently marked. After firing, tokens are consumed from place  $B$

# Petri net and biochemical networks

Standard Petri nets allow the representation of the essential components in biochemical pathways and they can be used to perform qualitative analysis (Reddy *et al.*, (1996) *Comput. Biol. Med.* **26**:9-24)).

Metabolic pathway = interconnection of networks of enzymatic reactions (product of one reaction is the a reactant (or an enzyme that catalyzes) a next reaction).

## Petri net modeling of five type of reactions:


Places = reactants, products or enzymes

Transitions = reactions

Arc weights = stoichiometric coefficients of the reactions

Catalyzed reaction: the enzyme place is linked to the transition by a test arc

Inhibited reaction: the enzyme is linked to the transition by an inhibitory arc (the transition is enabled when the place is not marked)


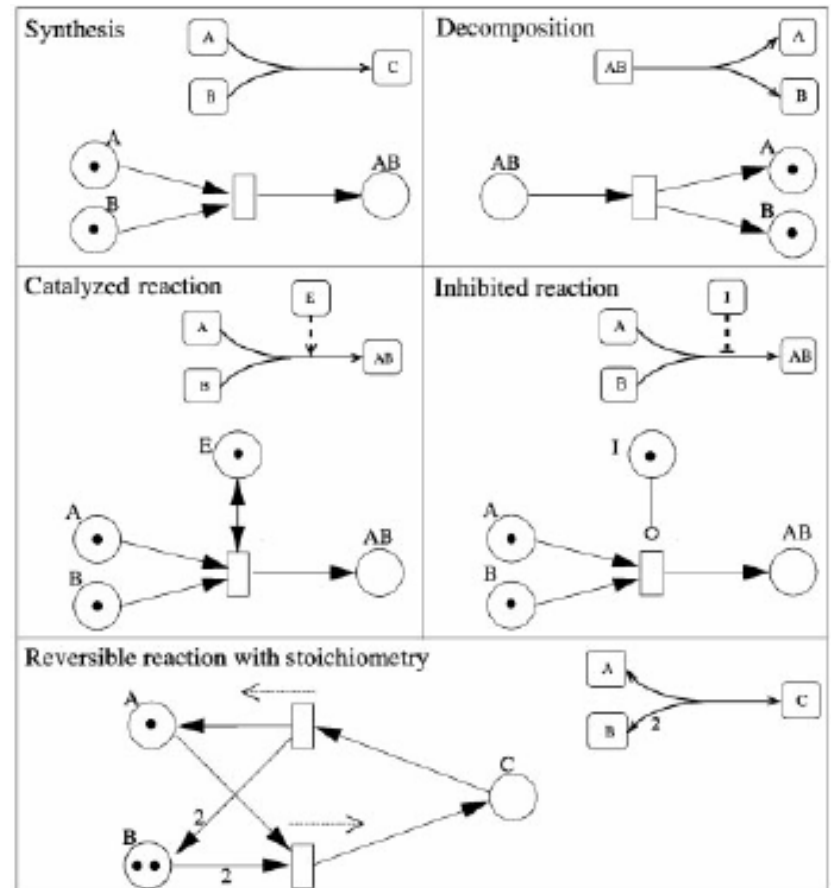


# Petri net models

## Firing a transition

- A transition is enabled to fire if all its pre-places are sufficiently marked, contain at least the required number of tokens defined by the weight assigned to the arcs.
- Results of the firing of an enabled transition: tokens of pre-places are consumed and new tokens are produced in its post-places. Their number are determined by the weight of the arcs going out of the transition.

### Example: Pentose phosphate pathway

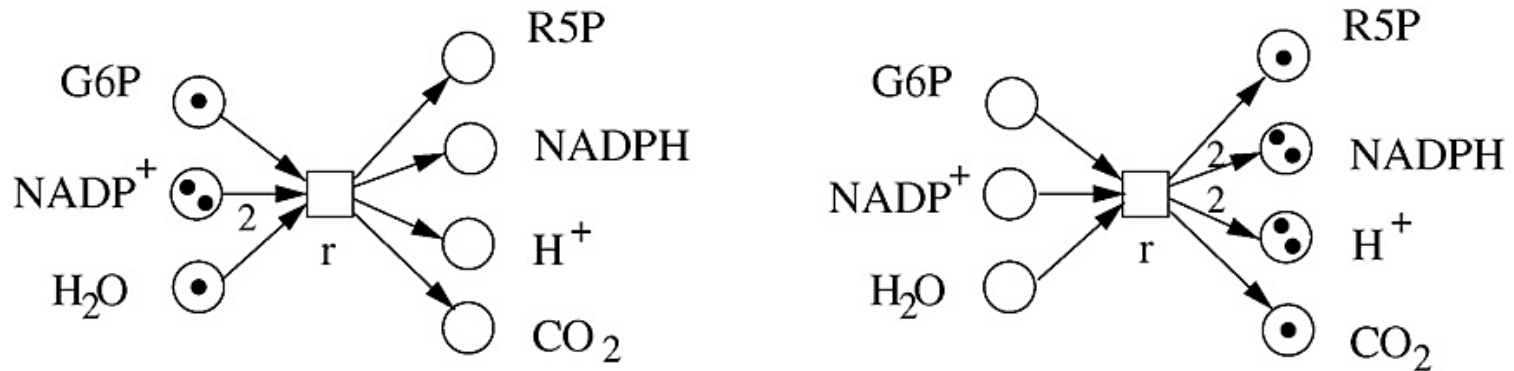


Grunwald *et al.*, 2008

The “token game” represents the dynamical evolution of the system


# Petri net models

Initial marking  $M_0$

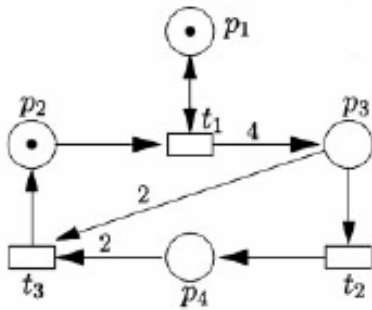


$p_1$  and  $t_1$  are connected through a test arc that means that  $p_1$  marking governs the enabling of  $t_1$  but is not modified by the firing of  $t_1$

new marking  $M_1$

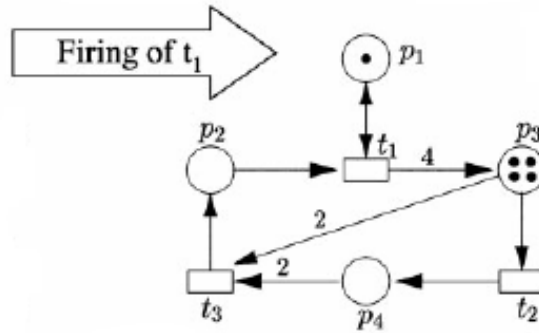

The token of  $p_2$  is consumed.  
Four tokens are produced in  $p_3$ .  
The new marking  $M_1$  allows the firing of  $t_2$


new marking  $M_2$

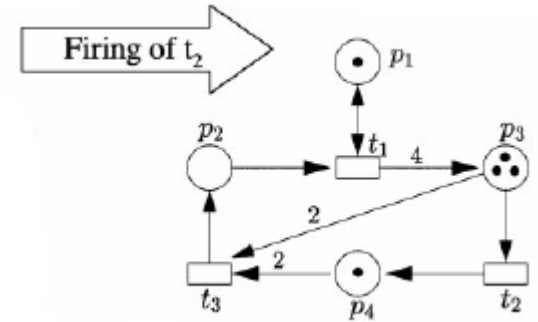

One token of  $p_3$  is consumed.  
One token is produced in  $p_4$ .  
The new marking  $M_2$  does not allow the firing of  $t_3$



# Petri net models

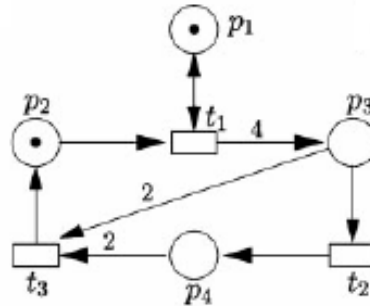

## Algebraic description of a Petri net

a marking = a vector giving the number of tokens allocated to each place  
 weighted arcs = definition of relation between a pre-place and a transition (preconditions)  
 and between a transition and a post-place (postconditions) = Pre and Post matrices  
 incidence matrix = for each transition, the balance of its firing onto each place (difference  
 between the number of tokens produced and the number of tokens consumed)

**initial marking**

$$M_0 = \begin{bmatrix} 1 \\ 1 \\ 0 \\ 0 \end{bmatrix}$$

**pre - condition matrix**

	$t_1$	$t_2$	$t_3$
$p_1$	1	0	0
$Pre = p_2$	1	0	0
$p_3$	0	1	2
$p_4$	0	0	2

**post - condition matrix**

	$t_1$	$t_2$	$t_3$
$p_1$	1	0	0
$Post = p_2$	0	0	1
$p_3$	4	0	0
$p_4$	0	1	0

**incidence matrix**

	$t_1$	$t_2$	$t_3$
$p_1$	0	0	0
$C = Post - Pre = p_2$	-1	0	1
$p_3$	4	-1	-2
$p_4$	0	1	-2

# Petri net models


## Algebraic description of a Petri net

The resulting marking  $M'$  of the net after a firing sequence (transition that have been fired) is given by the state equation:

$$M' = M + C \sigma$$


where  $M$  is the marking before the firing sequence,  $C$  is the incidence matrix and  $\sigma$  is a vector that gives for each transition its number of occurrences.

In our example, the firing sequence is  $t_1$  and  $t_2$ :



Initial marking  $M_0$

$t_1$  and  $t_2$  have been fired  $\rightarrow$



Resulting marking  $M_2$


$$M_2 = M_0 + C \sigma$$

$$\sigma = \begin{bmatrix} 1 \\ 1 \\ 0 \end{bmatrix}$$

$$M_2 = \begin{bmatrix} 1 \\ 1 \\ 0 \\ 0 \end{bmatrix} + \begin{bmatrix} 0 & 0 & 0 \\ -1 & 0 & 1 \\ 4 & -1 & -2 \\ 0 & 1 & -2 \end{bmatrix} \begin{bmatrix} 1 \\ 1 \\ 0 \end{bmatrix} = \begin{bmatrix} 1 \\ 1 \\ 0 \\ 0 \end{bmatrix} + \begin{bmatrix} 0 \\ -1 \\ 3 \\ 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 3 \\ 1 \end{bmatrix}$$


# Petri net models

Marking of the net after firing  $t_1$  and  $t_2$ :  $M_2 = \begin{bmatrix} 1 \\ 0 \\ 3 \\ 1 \end{bmatrix}$

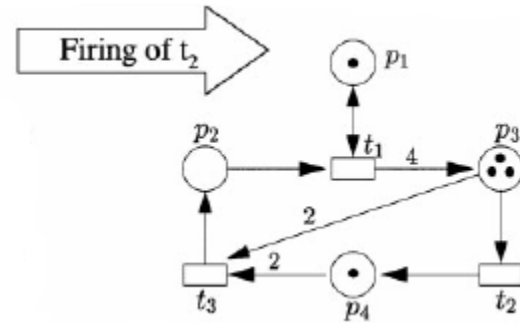

**The marking graph:** described the dynamical behavior from an initial marking, denoted  $R(M_0)$

$R(M_0)$ , the marking graph

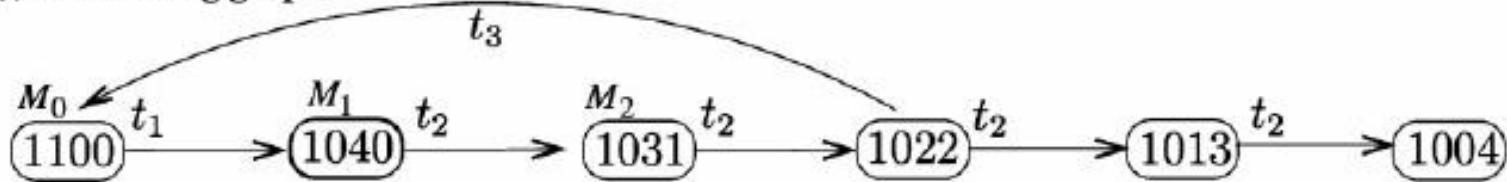

Example from Chaouiya ,2007

Standard Petri nets are discrete and non-temporized (time is implicit, the marking graph accounts for the possible sequence events).

# Petri net models

**Formal definition:** A standard Petri net is a quadruple  $N = (P, T, f, m_0)$ , where:

$P, T$  are finite, non-empty, disjoint sets.  $P$  is the set of places.  $T$  is the set of transitions.

An arc connects either a place to a transition or a transition to a place. If,  $F$  is the set of arcs

$F \subseteq (P \times T) \cup (T \times P)$ .

$f: ((P \times T) \cup (T \times P)) \rightarrow \mathbb{N}$  defines the set of directed arcs, weighted by non-negative integer values.

$f$  is a mapping that assigns a weight to an arc.

$m_0: P \rightarrow \mathbb{N}_0$  gives the initial marking.

## Notations:

$m(p)$  refers to the number of tokens on place  $p$  in the marking  $m$ . A place  $p$  is clean (empty, unmark) in  $m$  if  $m(p) = 0$ .

A set of places is called clean if all places are clean, otherwise it is marked.

The preset and postset of a node  $x \in P \cup T$  and are defined as:

Preset:  $\bullet x := \{y \in P \cup T \mid f(y, x) \neq 0\}$

Postset:  $x \bullet := \{y \in P \cup T \mid f(x, y) \neq 0\}$

For places and transitions, four types of sets:

$\bullet t$  preplaces of transition  $t$  (reaction's precursor)

$t \bullet$  postplaces of transition  $t$  (reaction's products)

$\bullet p$  pretransitions of place  $p$  (all producing reactions of a component)

$p \bullet$  posttransitions of place  $p$  (all consuming reactions of a component)

Generalized to a set of nodes  $X$ :

set of prenodes:  $\bullet X := \cup_{x \in X} \bullet x$

set of postnodes:  $X \bullet := \cup_{x \in X} x \bullet$

# Petri net models

## Definition : Firing Rule

Let  $N = (P, T, f, m_0)$  be a Petri net:

- A transition  $t$  is enabled in marking  $m$ , written as  $m|t\rangle$ , if  $\forall p \in \bullet t : m(p) \geq f(p,t)$ , else it is disabled.
- A transition  $t$ , which is enabled in  $m$ , may fire.
- When  $t$  in  $m$  fires, a new marking  $m'$  is reached, written as  $m|t\rangle m'$ , with  $\forall p \in P :$   
$$m'(p) = m(p) - f(p,t) + f(t,p)$$
- The firing happens atomically and does not consume any time.

# Petri net structural properties

Structural properties depend only on the arrangement of places, transitions and arcs. They characterize the network structure and are independent of the marking.

Initial model checking to prove that the model adheres to the assumption and modeling guideline.

Property		Informal Definition	Biological Meaning
PUR	Pure	There are no two nodes, directly connected in both directions. This precludes read arcs and double arcs.	No component is produced and consumed by the same reaction. Thus, enzymatic or enzyme-like reactions are formulated in more detail.
ORD	Ordinary	All arc weights are equal to 1.	Every stoichiometric coefficient of each reaction is equal to one.
HOM	Homogeneous	All outgoing arcs of a given place have the same multiplicity.	Each consuming reaction associated with one component takes the same amount of molecules of this component.
CON	Connected	A Petri net is connected if it holds for every two nodes a and b that there is an undirected path between a and b. Disconnected parts of a Petri net can not influence each other, so they can be usually analysed separately. In the following we only consider connected Petri nets.	All components in a system are directly or indirectly connected with each other through a set of reactions, e.g., metabolic paths, signal flows.
SC	Strongly Connected	A Petri net is strongly connected if it holds for every two nodes a and b that there is a directed path from a to b, vice versa. Strong connectedness involves connectedness and the absence of boundary nodes. It is a necessary condition for a Petri net to be live and bounded at the same time.	All components in a system are directly connected with each other through a set of reactions, e.g., metabolic paths, signal flows.
NBM	Non-blocking Multiplicity	The minimum of the multiplicity of the incoming arcs for a place is not less than the maximum of the multiplicities of its outgoing arcs.	The amount of produced and consumed molecules of a certain component is always equal.

Extract from Tutorial Snoopy, 2011,  
M. A. Blätke

# Petri net structural properties

CSV	Conservative	All transitions add exactly as many tokens to their post-places as they subtract from their pre-places (token-preservingly firing). A conservative Petri net is structurally bounded.	The total amount of consumed and produced molecules by a certain reaction is always equal.
SCF	Static conflict free	There are no two transitions sharing a pre-place. Transitions involved in a dynamic conflict compete for the tokens on shared places.	For every reactant exist just one possible reaction or there are no two reactions sharing at least one reactant.
FT0	No input transition	There exist no transitions without pre-places.	Infinite source of a component.
TF0	No output transition	There exist no transitions without post-places.	Sink of a component.
FP0	No input place	There exist no places without pre-transitions.	The component can not be produced by any reaction. Thus, such components are limiting.
PF0	No output place	There exist no places without post-transitions	Components can infinitely accumulate in the system. Thus, they are not consumed by any reaction.

# Petri net qualitative properties

Typical net dynamical properties can be checked. They characterize the system behavior of a model, which depend on the qualitative network and on the initial marking. They are independent of the time-dependent dynamic behavior and thus independent of kinetic information.

- **Boundedness:** For every place it holds that whatever happens, the maximum number of tokens on this place is bounded by a constant. It insures that, whatever the initial marking and the evolution of the net, the number of tokens in each place is bounded, *i.e.* limited. For metabolic networks, it means that no product can accumulate.
- **Liveness:** For every transition it holds that whatever happens, it will always possible to reach a state where this transition gets enabled. In a live net, all transitions (biological processes and reactions) are able to contribute to the net behavior forever, which precludes dead states. A dead state is a state where none of the transitions are enabled.
- **Reversibility:** For every state it holds that whatever happens the net will always be able to reach this state again. In biology, it means that the initial state of a system can be reproduced by any possible state reached from the initial condition.



# Petri net qualitative properties

## Boundedness

Property		Informal Definition	Biological Meaning
SB	Structurally bounded	A Petri net is structurally bounded if it is bounded in any initial marking.	It is not possible that any component accumulates in the system independent of the initial conditions.
1-B	1-bounded	A Petri net is 1-bounded if all its places are 1-bounded.	Number of molecules or the concentration of every component is limited to one only.
k-B	k-bounded	A Petri net is k-bounded if all its places are k-bounded.	Number of molecules or the concentration level of each component is limited to a constant number k.

1-bounded Petri nets are called **safe network**

Extract from Tutorial Snoopy, 2011, M. A. Blätke

### Formal definition:

- A place  $p$  is  $k$ -bounded if there exists a positive integer number  $k$ , which represents an upper bound for the number of tokens on this place in all reachable markings of the Petri net:

$$\exists k \in \mathbb{N}_0 : \forall m \in |m_0\rangle : m(p) \leq k$$

- A Petri net is  $k$ -bounded if all its places are  $k$ -bounded.
- A Petri net is structurally bounded if it is bounded in any initial marking.

# Petri net qualitative properties

## Liveness

### Formal definition:

- A transition  $t$  is dead in the marking  $m$  if it is not enabled in any marking  $m'$  reachable from:  
 $\nexists m' \in |m\rangle : m'(t)$
- A transition  $t$  is live, if it is not dead in any marking reachable from  $m_0$ .
- A marking  $m$  is dead, if there is no transition which is enabled in  $m$ .
- A Petri net is deadstate-free, if there are no reachable dead markings.
- A Petri net is live, if each transition is live.


## Reversibility

### Formal definition:

A Petri net is reversible if the initial marking can be reached again from each reachable marking:

$$\forall m \in |m_0\rangle : m_0 \in |m\rangle$$

# Petri net qualitative properties

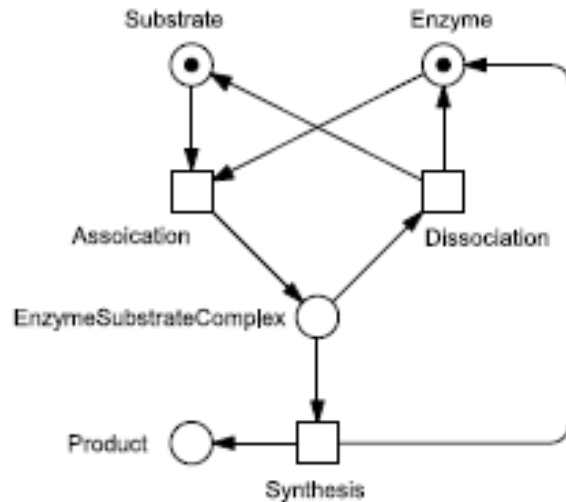

Reachable markings starting from initial marking  $m_0$  by playing the token game

Place	$m_0$	$m_1$	$m_2$
Enzyme	1	0	1
Substrate	1	0	0
Complex	0	1	0
Product	0	0	1

Extract from Tutorial Snoopy, 2011, M. A. Blätke

- Each place has an upper bound  $k$  equal to 1.
- All place are 1-bounded, thus the resulting Petri net is 1-bounded
- Marking  $m_2$  is dead, none of the translation can be enabled
- The Petri net has a deadstate because of  $m_2$
- The Petri net is not live because all transitions are not live
- The Petri net is not reversible because the initial state  $m_0$  can not be reached from marking  $m_2$

# Petri net qualitative properties



Important structural motifs of Petri net:

- Traps
- Siphons
- Invariants

## Trap:

A trap is a subnet that catches tokens and retain at least one of them. The number of tokens in a trap can decreased but never reached zero. It is a state of places such that every transition that inputs from these places also outputs from one of these places. Once marked a trap remains marked.

Cyclic structures in a biological system that are activated by an input should be represented in a model as a trap.

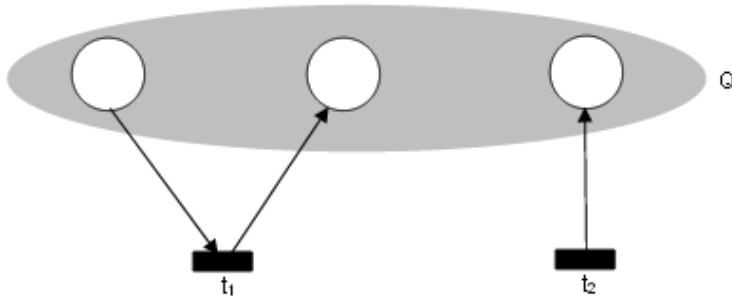

## Definition

A set of places  $Q \subseteq P$  is called trap if  $Q \bullet \subseteq \bullet Q$  (the set of post-transitions is contained in set of pre-transitions), *i.e.*, every transition which subtracts tokens from a place of the trap, also has a post-place in this set.


$Q \bullet = \{t_1\}$  et  $\bullet Q = \{t_1, t_2\}$  thus  $Q \bullet \subseteq \bullet Q$

Token count in this trap remains the same by firing  $t_1$  but increases by firing  $t_2$

# Petri net qualitative properties

## Siphon:

A siphon is a subnet that releases all its tokens. A Petri net without siphons is live while a system in a dead state has a clean siphon. In biological terms, a siphon is a finite source of molecules or energy. It could also be a cycle that might produce molecules by consuming itself.

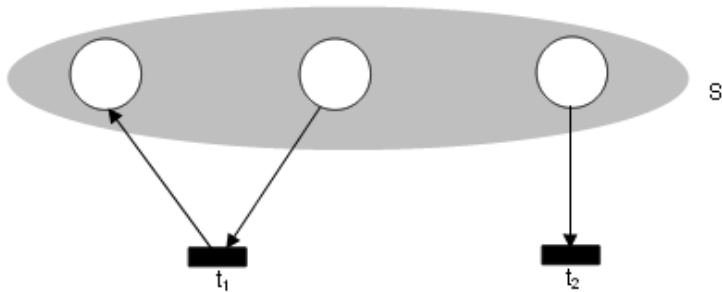


### Definition

A non-empty set of places  $D \subseteq P$  is called siphon if  $\bullet D \subseteq D \bullet$  (the set of pre-transitions is contained in set of post-transitions), *i.e.*, every transition which fires tokens onto a place in the siphon, also has a pre-place in this set.

$\bullet D = \{t_1\}$  et  $D \bullet = \{t_1, t_2\}$  thus  $\bullet D \subseteq D \bullet$

Token count in this siphon remains the same by firing  $t_1$  but decreases by firing  $t_2$



$\bullet D = \{r_1, r_2\}$  et  $D \bullet = \{r_1, r_2\}$  thus  $\bullet D \subseteq D \bullet$


Transitions  $r_1$  and  $r_2$ , which remove a token from A or B, can add a token to A or B. However, once they are empty of tokens, the places will never regain tokens.

# Petri net qualitative properties

## Summary

Properties	Trap	Siphon
Behavioral property	By definition, once a place in a trap has a token, there will always be a token in at least one of the places in the trap. Hence, a trap having at least one token can never lose all of its tokens. In other words, if a trap is marked under some marking, it remains marked under each successor marking.	By definition, once all places in a siphon have no token, there will never be a token in any one of the places in the siphon. Hence, a siphon having lost all of its tokens can never obtain a token again. In other words, if a siphon is token-free under some marking, then it remains token-free under each successor marking.
Union	Union of two traps is again a trap [2].	Union of two siphons is again a siphon [2].

# Petri net qualitative properties

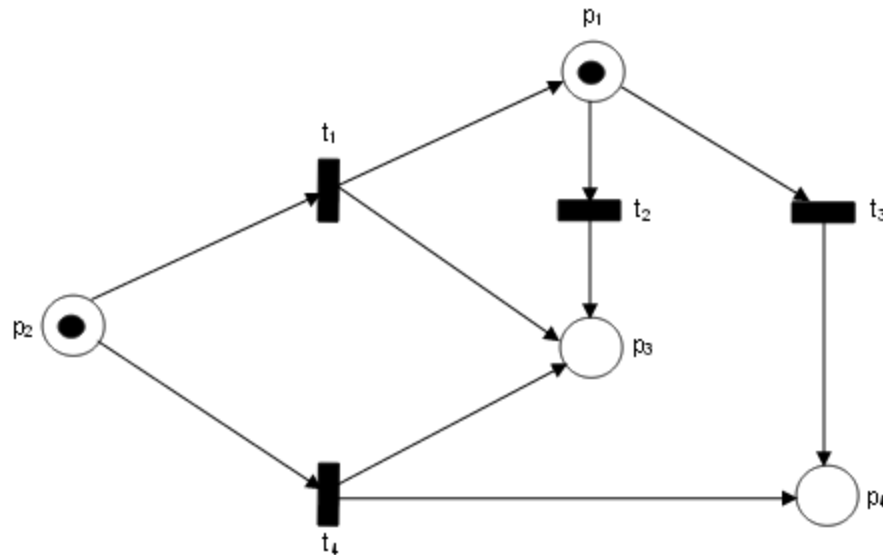

Set of places :

$$S_1 = \{p_1, p_2, p_3\}$$

$$S_2 = \{p_1, p_2, p_4\}$$

$$S_4 = \{p_2, p_3\}$$

$$S_5 = \{p_2, p_3, p_4\}$$

$$S_3 = \{p_1, p_2, p_3, p_4\}$$

Among these different sets of places which one are traps and/or siphons ?

# Petri net qualitative properties

## Invariants:


In Petri net context, invariants indicate states in the net graph that are not changed after a transformation or a sequence of transformations. We can distinguish two types of invariants, place invariants and transition invariants.

**P-invariants (place invariants):** it is a set of places over which the weighted sum of tokens is constant and independent of any firing. Thus a P-invariant conserves the number of tokens. Then each place of a P-invariant is bounded. In the biological context, P-invariant can assure mass conservation and avoid an infinite increase of molecules in the model.

A vector of places is called P-invariant if it is a non-trivial non-negative integer solution of the linear equation system  $x^T \cdot C = 0$  (C incidence matrix)



# Petri net qualitative properties

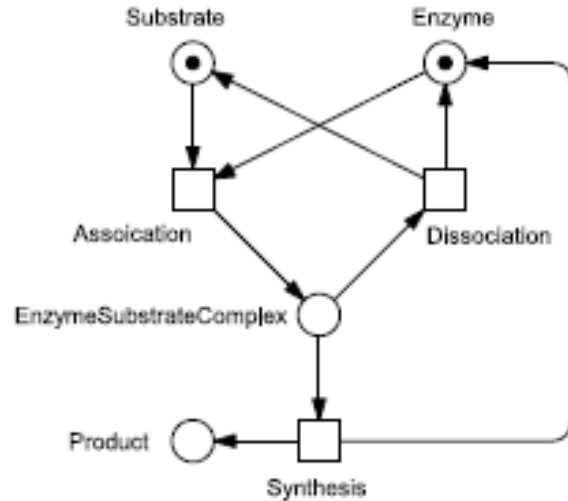

## Incidence matrix (Post – Pre)

	<i>Association</i>	<i>Dissociation</i>	<i>Synthesis</i>
Enzyme	-1	1	1
Substrate	-1	1	0
Complex	1	-1	-1
Product	0	0	1

## Pre-condition matrix

	<i>Association</i>	<i>Dissociation</i>	<i>Synthesis</i>
Enzyme	1	0	0
Substrate	1	0	0
Complex	0	1	1
Product	0	0	0

## Post-condition matrix

	<i>Association</i>	<i>Dissociation</i>	<i>Synthesis</i>
Enzyme	0	1	1
Substrate	0	1	0
Complex	1	0	0
Product	0	0	1

# Petri net qualitative properties

## Incidence matrix (Post – Pre)

	<i>Association</i>	<i>Dissociation</i>	<i>Synthesis</i>
Enzyme	-1	1	1
Substrate	-1	1	0
Complex	1	-1	-1
Product	0	0	1

Vector  $x$  of places:  $x = \begin{pmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \end{pmatrix}$

Solution of  $x^T \cdot C = 0$


$$(x_1 \ x_2 \ x_3 \ x_4) \begin{pmatrix} -1 & 1 & 1 \\ -1 & 1 & 0 \\ 1 & -1 & -1 \\ 0 & 0 & 0 \end{pmatrix} = 0 \quad \Rightarrow \quad \begin{array}{l} -x_1 - x_2 + x_3 = 0 \\ x_1 + x_2 - x_3 = 0 \\ x_1 - x_3 + x_4 = 0 \end{array} \quad \Rightarrow \quad \begin{array}{l} x_1 + x_2 = x_3 \\ x_2 = x_4 \end{array}$$

2 solutions : P-invariant 1  $x = (1, 0, 1, 0)$  {Enzyme; EnzymeSubstrateComplex}  
 P-invariant 2  $x = (0, 1, 1, 1)$  {Substrate; EnzymeSubstrateComplex ; Product}

Each place is contained in at least one of the two P-invariants. Thus, the Petri net of our example is covered by P-invariants.

# Petri net qualitative properties

**T-invariant:** it is a sequence of transition  $\sigma$  that reproduce an initial state, which enabled the firing of the transitions in the T-invariant. In the biological context, T-invariants ensure that the model of biological system can reinitialize a certain initial state. Firing the transitions of a T-invariant leads to a steady state behavior.

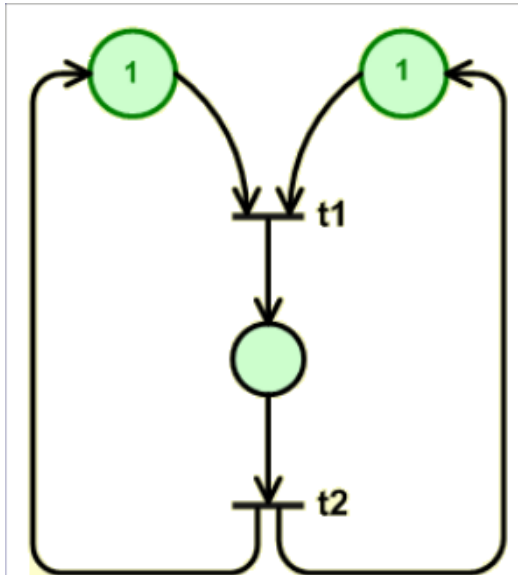

Example: after firing  $t_1$  and  $t_2$  the marking will be the same

A vector of transition is called T-invariant if it is a non trivial non-negative integer solution of the linear equation system  $C \cdot y = 0$  ( $C$  incidence matrix)


# Petri net qualitative properties

## Incidence matrix (Post – Pre)

	<i>Association</i>	<i>Dissociation</i>	<i>Synthesis</i>
Enzyme	-1	1	1
Substrate	-1	1	0
Complex	1	-1	-1
Product	0	0	1

Transition vector  $y$  of places:  $y = \begin{pmatrix} y_1 \\ y_2 \\ y_3 \end{pmatrix}$

Solution of  $C \cdot y = 0$

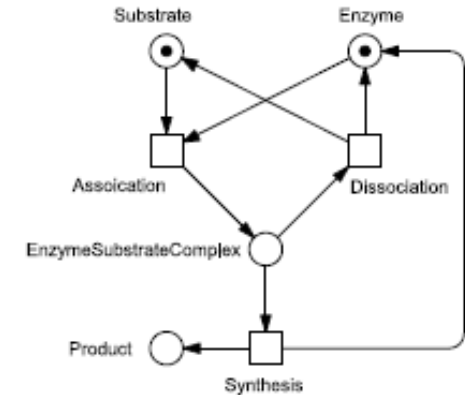

$$\begin{pmatrix} -1 & 1 & 1 \\ -1 & 1 & 0 \\ 1 & -1 & -1 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} y_1 \\ y_2 \\ y_3 \end{pmatrix} = 0 \quad \Rightarrow \quad \begin{aligned} -y_1 + y_2 + y_3 &= 0 \\ -y_1 + y_2 &= 0 \\ y_1 - y_2 - y_3 &= 0 \\ y_3 &= 0 \end{aligned} \quad \Rightarrow \quad \begin{aligned} y_1 &= y_2 \\ y_3 &= 0 \end{aligned}$$

Only one solution:  $y = (1, 1, 0)$

T-Invariant 1 : {Association, Dissociation}

As the transition Synthesis is not contained in the T-invariant, the Petri net is not covered by T-invariants